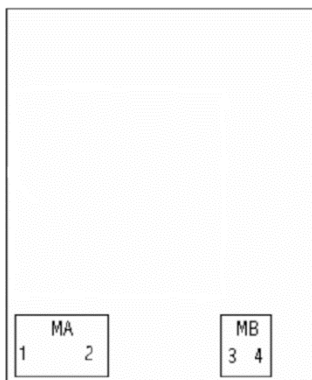



**ALIMENTATORE
POWER CONVERTER
STROMVERSORGUNG**

SPECIFICHE TECNICHE – TECHNICAL SPECIFICATION – TECHNISCHE SPEZIFIKATION

Alimentazione ingresso Power supply input Stromversorgung Eingang	100–240 V ca, 50/60 Hz 100–240 V ca, 50/60 Hz 100–240 V AC, 50/60 Hz	Tensione di uscita Output voltage Ausgangsspannung	24 V cc (regolato) 24 V dc (regulated) 24 V Gleichstrom (reguliert)
Potenza massima in uscita Maximum output power Maximale Ausgangsleistung	10 W	Massimo carico capacitivo Maximum capacitive load Maximale kapazitive Last	680 µF
Fusibile Fuse Sicherung	200 mA ritardato 200 mA delayed 200 mA verzögert	Isolamento Insulation Isolierung	Classe II Class II Klasse II
Temperatura di funzionamento Operating temperature Betriebstemperatur	- 10 °C / + 50 °C 14 °F / 122 °F	Umidità Humidity Luftfeuchtigkeit	Massimo 85% senza condensa Maximum 85% non-condensing Maximal 85% nicht kondensierend
Temperatura di stoccaggio Storage temperature Lagertemperatur	- 20 °C / + 60 °C - 4 °F / 140 °F		
Dimensioni d'ingombro Overall dimensions Abmessungen	53 x 93 x 70 mm (l x h x p) 2.1 x 3.7 x 2.8 in (l x h x d)	Montaggio Installation Installation	Su barra OMEGA On OMEGA bar Auf OMEGA Leiste
Materiale contenitore Housing material Material Gehäuse	Poliamide autoestinguente (UL94 V0) Self-extinguishing Polyamide (UL94 V0) Selbstlöschender Polyamid (UL 94 V0)	Grado di protezione frontale Frontal protection class Frontale Schutzklasse	IP 00
Peso Weight Gewicht	120 g	Conessioni Wiring connections Kabelanschlüsse	Morsettiere a vite, passo 5,08 mm Screw terminals, pitch 5.08 mm Schraubklemmen, Raster 5,08 mm
Conformità alle Normative Compliance to norms Normen-Konformität	EN61000-6-2, EN61000-6-3, EN61010-1		

CONNESSIONI – CONNECTIONS – ANSCHLÜSSE


Numero Number Nummer	Morsettiere MA , 2poli, passo 10,16 MA terminal block, 2-pole, pitch 10.16 MA -Klemmenblock, 2-polig, Rastermaß 10.16
1	Linea 100 – 240 V ac Line 100 – 240 V ac Zuleitung 100 – 240 V Wechselstrom
2	Neutro 100 – 240 V ac Neutral 100 – 240 V ac Masse 100 – 240 V Wechselstrom
Numero Number Nummer	Morsettiere MB , 2poli, passo 5,08 MB terminal block, 2-pole, pitch 5.08 MB -Klemmenblock, 2-polig, Rastermaß 5.08
3	+ Alimentazione 24 V cc + Power supply 24 V dc + Stromversorgung 24 V Gleichstrom
4	- Alimentazione 24 V cc - Power supply 24 V dc - Stromversorgung 24 V Gleichstrom

CARATTERISTICHE – CHARACTERISTICS – EIGENSCHAFTEN