

CELLA DI CARICO CENTRALE OFF-CENTER LOAD CELL PLATTFORM-WÄGEZELLE



A richiesta con certificazione
Upon request with certification
Auf Anfrage mit Zertifizierung



SPECIFICHE TECNICHE - TECHNICAL SPECIFICATION - TECHNISCHE SPEZIFIKATION

Materiale Material Material	Alluminio Aluminum Aluminium	Portata Nominal load Nennlast	5, 10, 20, 30, 50, 100 kg
Carico limite Limit load Grenzlast	150 % del fondo scala 150 % of full scale 150 % der Nennlast	Carico di rottura Breaking load Bruchlast	300 % del fondo scala 300 % of full scale 300 % der Nennlast
Tensione di alimentazione Power supply voltage Versorgungsspannung	Massimo 15 VCC Maximum 15 VDC Maximal 15 V Gleichstrom	Segnale di uscita Output signal Ausgangssignal	2 mV/V
Tolleranza di uscita Output tolerance Ausgangstoleranz	0,1 % del fondo scala 0.1 % of full scale 0,1 % der Nennlast	Tolleranza di zero Zero tolerance Nulltoleranz	1 % del fondo scala 1 % of full scale 1 % der Nennlast
Linearità Linearity Linearität	0,03 % del fondo scala 0.03 % of full scale 0,03 % der Nennlast	Isteresi Hysteresis Hysteres	0,03 % del fondo scala 0.03 % of full scale 0,03 % der Nennlast
Ripetibilità Repeatability Wiederholbarkeit	0,03 % del fondo scala 0.03 % of full scale 0,03 % der Nennlast	Resistenza di isolamento Insulation resistance Isolationswiderstand	≥ 5000 MΩ
Resistenza ingresso Input resistance Eingangswiderstand	412 - 400 Ω	Resistenza uscita Output resistance Ausgangswiderstand	350 - 353 Ω
Deriva sotto carico (30 minuti) Creep (30 minutes) Kriechfehler (30 Minuten)	0,03 % del fondo scala 0.03 % of full scale 0,03 % der Nennlast	Gradi di protezione Protection class Schutzklasse	IP 65
Temperatura di funzionamento Operating temperature Betriebstemperatur	- 20 °C / + 70 °C - 4 °F / 158 °F	Compensazione termica Thermal compensation Thermische Kompensierung	- 10 °C / + 40 °C 14 °F / 104 °F
Deriva termica di fondo scala Temperature deviation full scale Temperaturabweichung Endwert	0,002 % del fondo scala/°C 0.002 % of full scale/°C 0,002 % des Skalenendwertes/°C	Deriva termica di zero Temperature deviation zero Temperaturabweichung Nullpunkt	0,003 % del fondo scala/°C 0.003 % of full scale/°C 0,003 % des Skalenendwertes/°C
Cavo standard Standard cable Standard-Kabel	3 metri - 6 conduttori (schermo non collegato a corpo cella) 3 meters - 6 wires (shield not connected to the load cell body) 3 Meter - 6 Leitungen (Abschirmung nicht mit dem Gehäuse der Wägezelle verbunden)		

DIMENSIONI - DIMENSIONS - ABMESSUNGEN

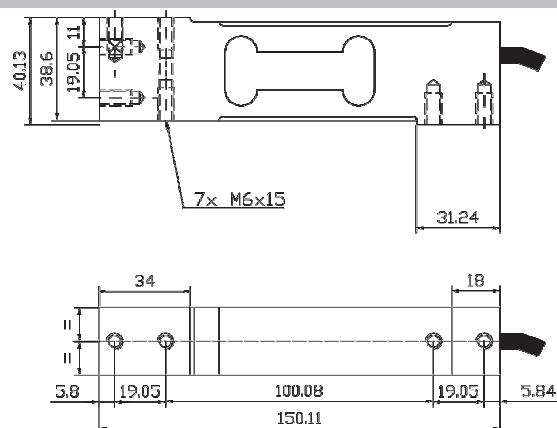

Piatto
Weighing plate
Wiegeplatte

40 x 40 cm
15.7 x 15.7 in

CONNESSIONI - CONNECTIONS - ANSCHLÜSSE

Rosso Red Rot	Alimentazione+ Power supply+ Versorgung+	Nero Black Schwarz	Alimentazione- Power supply- Versorgung-	Verde Green Grün	Segnale+ Signal+ Signal+	Bianco White Weiß	Segnale- Signal- Signal-	Blu Blue Blau	Riferimento + Reference + Referenz +	Marrone Brown Braun	Riferimento - Reference - Referenz -
---------------------	--	--------------------------	--	------------------------	--------------------------------	-------------------------	--------------------------------	---------------------	--	---------------------------	--

CARATTERISTICHE - CHARACTERISTICS - EIGENSCHAFTEN